



## OEM/ODM Products Provider

- We specialize in developing and providing AI solutions related to security and business intelligence.
- We design and manufacture IP based security products and provide OEM services.



**NDAA COMPLIANT**

**Toronto • Montreal**

# ARTIFICIAL INTELLIGENCE NETWORK CAMERAS

## Key Features

- Intelligent AI Chipset
- 5MP / 4MP Resolution
- 98ft IR Range
- Onboard Storage

NEWLY LAUNCHED

### K-UD-4M2812AI



AI

- 120dB WDR
- IP67
- 3-Axis
- AI Chipset
- Vandal Proof
- Smart functions
- 2.8-12mm Motorized Lens

### K-UD-4F0028AI



AI

- 120dB WDR
- IP67
- 3-Axis
- AI Chipset
- Vandal Proof
- Smart functions
- 2.8mm Fixed Lens

### K-VD-5F0028AI



AI

- 120B WDR
- IP66
- 3-Axis
- AI Chipset
- Amba WDR
- Smart functions
- 2.8mm Fixed Lens

### K-VD-5M2812AI



AI

- 120dB WDR
- IP66
- 3-Axis
- AI Chipset
- Amba WDR
- Smart functions
- 2.8 12mm Motorized Lens

# COLOR VIEW 5MP NETWORK CAMERAS

## Key Features

- High resolution
- 7\*24 hours colourful image
- Big Iris
- Smart Intrusion Prevention
- True WDR
- Multiple interfaces

**NEWLY LAUNCHED**

K-UT-5F0028CV | K-UT-5F0004CV



- 120dB WDR
- IP67
- Mic
- 3-Axis
- HLC
- Smart functions

K-UB-5F0004CV | K-UB-5F0006CV



- 120dB WDR
- IP67
- Mic
- 3-Axis
- HLC
- Smart Functions

# STARLIGHT PRO NETWORK CAMERAS

## Key Features

- Advanced night vision
- High light transmittance
- Smart Intrusion Prevention
- True WDR
- Multiple interfaces

**NEWLY LAUNCHED**

### K-UT-5F0028(04)SL



- 5MP resolution
- Fixed lens (2.6mm, 4.0mm)
- Starlight Pro technology ultra-high images
- 120db True WDR
- 9:16 Corridor Mode
- Built-in Mic
- Smart IR, up to 30m (98ft) IR distance
- Supports 256 G Micro SD card
- IP67 protection

### K-5D0028(04)SL



- 5MP resolution
- Fixed lens (2.8mm, 4.0mm)
- Smart intrusion prevention
- Starlight Pro, 0.003Lux (F1.6)
- Audio I/O 1/1, Alarm I/O 1/1
- 30M IR
- IP67, IK10, 2KV surge prevention

### K-UB-5F0028(04)SL



- 5MP resolution
- Fixed lens (2.8mm, 4.0mm)
- Smart intrusion prevention
- Starlight Pro, 0.003Lux (F1.6)
- Audio I/O 1/1, Alarm I/O 1/1, built-in mic
- 40M IR
- IP67, 2KV

### K-UE-5M2913SL



- 5MP resolution
- Motorized zoom lens 2.7mm-13.5mm
- Smart intrusion prevention
- Starlight Pro, 0.002Lux (F1.2)
- Audio I/O 1/1, Alarm I/O 1/1, built-in mic
- 40M IR
- IP67, IK10, 6KV

# STARLIGHT PRO NETWORK CAMERAS

## K-UD-5M2713SL



- 5MP resolution
- Motorized zoom lens 2.7mm-13.5mm
- Smart intrusion prevention
- Starlight Pro, 0.002Lux (F1.2)
- Audio I/O 1/1, Alarm I/O 1/1, built-in mic
- 40M IR
- IP67, IK10, 6KV
- 33X

## K-UB-5M2713SL



- 5MP resolution
- Motorized zoom lens 2.7mm-13.5mm
- Smart intrusion prevention
- Starlight Pro, 0.002Lux (F1.2)
- Audio I/O 1/1, Alarm I/O 1/1
- 50M IR
- IP67, IK10, 6KV

## K-UP-440XSL



- 4MP resolution, 60 fps
- 40X Optical Zoom (5.7~228.0mm)
- Gyroscope stabilization
- Manual wiper function
- Vari-focal laser: 650m (2132ft) distance
- 120 dB optical WDR
- Optical defog, Self-adaptive defog
- H.265
- AC 24V±25%, DC 24V±25%, PoE++ (IEEE 802.3bt)
- 1/1 audio I/O, 7/2 alarm I/O, 1 RS485
- 256G Micro SD card
- IP66

## K-UP-433XSL



- 4MP resolution, 30fps
- 1/2.8" progressive scan CMOS
- 33x optical zoom (4.5~148.5mm)
- Ultra 265, H.265
- 200m IR distance
- Alarm I/O, Audio I/O
- 120dB True WDR
- AC24V/DC24V, ±25%
- IP66
- PoE (PSE Required)

## K-UP-233XSL



- 2MP resolution, 60fps
- 1/2.8", Starlight Pro
- 150m (492 ft) IR distance
- 120 dB true WDR
- Ultra 265, H.265, H.264, MJPEG
- Five streams
- AC 24V±25%, DC 24V±25% or PoE
- 256 GB
- Alarm 2/1 I/O, Audio 1/1 I/O
- IP66

## K-UP-222XSL



- 2MP resolution, 60fps
- 1/2.8" progressive scan CMOS
- 22x optical zoom (5.2~114.4mm)
- Ultra 265, H.265
- 150m IR distance
- Alarm I/O, Audio I/O
- 120dB True WDR
- DC12V, Max 27.6W
- P66
- PoE (PSE Required)

## K-UD-8F0028

4K



- 8MP Fixed Lens Dome
- 2.8mm Fixed lens
- Smart IR up to 30 m (98 ft)
- 2D/3D DNR
- Compression Ultra 265
- Triple streams
- IP67
- 3-Axis

## K-UT-8F0028W

4K

BLACK AVAILABLE



- 8MP WDR Fixed Turret
- 2.8mm Fixed lens
- Smart IR, up to 30 m (98 ft)
- True WDR
- 2D/3D DNR
- Black option available

## K-UB-8F0004W

4K



- 8MP WDR Mini Bullet
- 4mm Fixed lens
- Smart IR , up to 30 m (98 ft)
- True WDR
- 3Axis

## K-UT-8F0028

4K



- 8MP Fixed Turret
- 8.0 megapixel
- 2.8mm fixed lens
- Smart IR up to 30 m (98 ft)
- 2D/3D DNR

# 8MP / 4K IP CAMERAS

## Key Features

- 8MP Resolution
- Weatherproof IP67
- Onvif Compatible
- Smart IR
- POE / DC 12V

### K-UM-8F0042SL

4K



- 4K Starlight Pro OmniView Network Camera
- 180° Horizontal viewing angle
- D41• 4x4.2mm lens
- Smart IR, up to 30m IR distance
- 120dB True WDR
- AC24V/DC24V
- 18V~48V in DC

### K-UF-80018


4K




- 4K Ultra HD
- Vandal-resistant Fisheye
- Fixed Dome Camera
- Fisheye, panoramic and PTZ view
- Smart IR, up to 10m IR distance
- Built-in Mic
- Built-in Speaker
- IK10

### K-UB-8M2812

4K

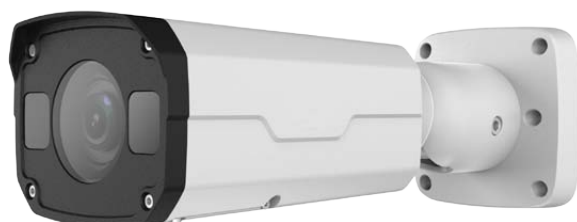

- 8MP Motorized WDR Bullet,
- 2.8~12mm automatic focusing and motorized zoom lens
- Smart IR up to 50m (164 ft)
- True WDR
- 3-Axis

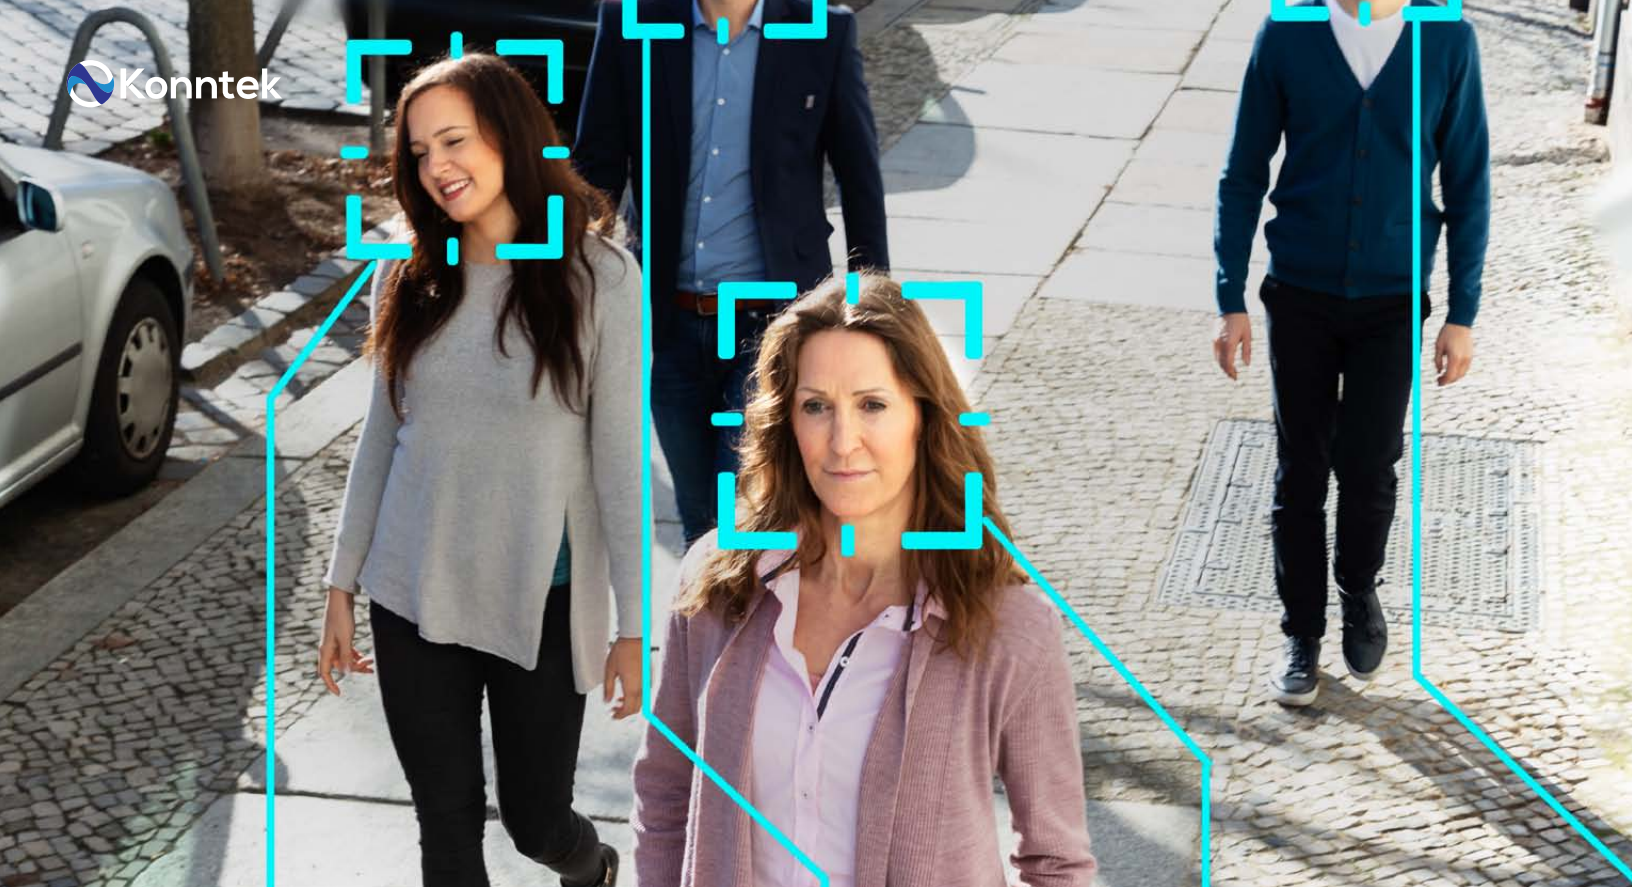

## K-UT-5F0028SLW



BLACK  
AVAILABLE

- 5MP WDR Starlight Pro IR Fixed Turret Camera
- 2.8mm Lens Fixed Lens
- Smart IR up to 30 m (98 ft) IR distance
- True WDR
- 3-Axis
- Built in microphone
- Black option available

## K-UT-5F0028



- 5MP Turrent Fixed lens
- 2.8mm Fixed Lens
- Smart IR up to 30m (98ft)
- 3-Axis

## K-UB-5M2812



- 5MP Motorized Bullet
- 2.8 ~ 12mm, Motorized Zoom Lens
- 3-Axis

## K-UB-5M2812SLW



- 5MP Motorized Bullet
- 2.8 ~ 12mm, motorized zoom lens
- True WDR
- Starlight Pro Illumination
- 3-Axis

# 5MP NETWORK CAMERAS

## Key Features

- 5MP Resolution
- Weatherproof IP67
- Onvif Compatible
- Smart IR
- POE / DC 12V

### K-UD-5F0028



- 5MP Fixed Dome Camera
- 2.8mm Fixed Lens
- Smart IR, up to 30m (98ft) IR distance
- 2-Axis

### K-UD-5F0028SLW



- 5MP WDR Starlight Pro IR Fixed Dome Camera
- 2.8mm Fixed Lens
- Smart IR up to 30m (98ft) IR distance
- True WDR
- 3-Axis

### K-UD-5M28125SLW



- 5MP WDR Starlight Pro
- Motorized zoom lens 2.8-12mm lens
- Smart IR, up to 30m (98ft) IR distance
- 3-Axis

### K-UD-5M2812



- 5MP Motorized zoom dome camera
- Motorized Vari-focal lens 2.8mm~12mm
- Smart IR up to 30m (98ft) IR distance
- 3-Axis

# 5MP NETWORK CAMERAS

## Key Features

- 5MP Resolution
- Weatherproof IP67
- Onvif Compatible
- Smart IR
- POE / DC 12V



ID 435024686199



ID 546002359151



ID 324267334567

ID 646300628981

K-UB-5F0040SLW

K-UB-5F0040



- 5MP WDR Starlight Pro MiniFixed Bullet
- Fixed Lens 4.0mm Lens
- Starlight Pro Illumination
- Smart IR up to 30 m (98 ft)
- 9:16 Corridor Format
- 3-Axis



- 5MP Fixed Mini Bullet
- 4.0mm Fixed Lens
- Smart IR up to 30m (98ft)
- 3-Axis

# 4MP CAMERAS

## Key Features

- Smart IR
- True WDR
- Smart IR (98ft)
- 3 Axis
- Onvif Compatible
- POE / DC 12V

K-UT-4F0028W

BLACK  
AVAILABLE



- 4MP IR Fixed Dome Camera
- 2.8mm Fixed Lens
- Smart IR, up to 30 m (98 ft) IR distance
- True WDR (Wide Dynamic Range)
- 3-Axis
- Black option available

K-UD-4F0028W

BLACK  
AVAILABLE



- 4MP IR Fixed Dome Camera
- 2.8mm Fixed Lens
- Smart IR, up to 30 m (98 ft) IR distance
- True WDR (Wide Dynamic Range)
- 3-Axis
- Black option available

1080 p

720 p

# 2MP NETWORK CAMERAS

## Key Features

- 5MP Resolution
- Weatherproof IP67
- Onvif Compatible
- Smart IR
- POE / DC 12V

### K-UP-204XAL



- 2MP LightHunter Active Deterrence Network PTZ Dome Camera
- LightHunter Illumination
- Up to 50 m (164 ft) IR and 10m (33 ft) warm light distance
- WDR
- Built-in microphone & speaker

### K-UP-233XSL



- 2MP Starlight Pro Laser IR Network PTZ Camera
- 33x optical zoom (4.5~148.5mm)
- Smart IR, up to 30m IR distance
- Vari-focal laser: 30m to 500m(1640ft) distance
- All-weather design
- Alarm I/O, Audio I/O
- AC24V, DC24V, 8~47W
- (-P) PoE

### K-UP-238XSL



- 2MP 38x Starlight Pro IR Network PTZ Starlight Pro Camera
- 38x optical zoom (5.7~216.6mm)
- Smart IR, up to 250m (820ft),
- Alarm I/O 2/1, Audio I/O 1/1
- AC 24V±25%, DC 24V±25%

### K-UP-244XSL



- 2MP 44x Starlight Pro IR Network PTZ Starlight Pro Camera
- 44x optical zoom (5~220mm)
- IR up to 250m (820ft),
- Alarm I/O 2/1, Audio I/O 1/1, AC 24V±25%, DC 24V±25%, 16~51W
- -40°C ~ 70°C (-40°F ~ 158°F)
- IP66

# NETWORK VIDEO RECORDERS

## Key Features

- Ultra H265
- Onvif Compatible
- Supports up to 10TB per Sata
- Plug & Play Option
- Cloud Upgrade Option

### K-USN-04041



- 4-ch
- 1-SATA U
- Ultra 265/H.265/H.264 NVR
- Third-party IP cameras supported with ONVIF conformance:
- Support 1-ch HDMI, 1-ch VGA, HDMI and VGA
- Up to 6MP resolution recording
- 1 SATA HDD up to 10 TB
- Support cloud upgrade

### K-USN-08081



- 8-ch
- 1-SATA U
- Ultra 265/H.265/H.264 NVR
- Third-party IP cameras supported with ONVIF conformance:
- Support 1-ch HDMI, 1-ch VGA, HDMI and VGA
- Up to 6MP resolution recording
- 1 SATA HDD up to 10 TB
- Support cloud upgrade

### K-UVN-04041



- 4-ch
- 1-SATA
- Ultra 265/H.265/H.264
- Plug & Play with 4 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance:
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA output
- Up to 8MP resolution recording
- 1 SATA HDD up to 10 TB
- Support cloud upgrade

### K-UVN-08081



- 8-ch
- 1-SATA
- Ultra 265/H.265/H.264
- Plug & Play with 8 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance:
- Support 1-ch HDMI, 1-ch VGA, HDMI and VGA output
- Up to 8MP resolution recording
- 1 SATA HDD up to 10 TB
- Support cloud upgrade

# NETWORK VIDEO RECORDERS

## Key Features

- Ultra H265
- Onvif Compatible
- Supports up to 10TB per Sata
- Plug & Play Option
- Cloud Upgrade Option

### K-UVN-16162



- 16 Channel
- 2-SATA
- Ultra 265/H.265/H.264
- Plug & Play with 16 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance:
- Support 1-ch HDMI, 1-ch VGA HDMI and VGA output
- Up to 8MP resolution recording
- 2 SATA HDD up to 10 TB
- Support cloud upgrade

### K-UVN-32168



- 32 Channel
- 4 HDDs 4K NVR
- Support Ultra265/H.265/H.264 video formats
- Third-party IP cameras supported with ONVIF conformance:
- HDMI1/VGA and HDMI2 independent outputs provided
- Up to 12 Megapixels resolution recording
- Support RAID 0, 1, 5, 6, 10
- 8 SATA HDDs, Up to 10TB for each HDD
- Dewarping support for fisheye cameras
- Support N+1 Hot spare
- Support for 12V Power output
- Plug & Play with up to 16 independent PoE network interfaces
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

### K-UVN-64008



- 64 Channel
- 8 HDDs RAID NVR,
- Support Ultra 265/H.265/H.264 video formats
- Third-party IP cameras supported with ONVIF conformance:
- Support 2-ch HDMI, 1-ch VGA HDMI2 at up to 4K(3840x2160) resolution
- 2 independent outputs provided
- Up to 12 Megapixels resolution recording
- 8 SATA HDDs, Up to 10TB for each HDD
- Various fisheye dewarping modes for live view and playback for both web interface and GUI
- Support N+1 Hot spare
- Support for 12V Power output
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade
- Support OSD function
- Support PTZ control function
- Support export system log
- Support different User authorized level

### K-UVN-32008



- 32 Channel
- 8 HDDs RAID NVR
- Support Ultra 265/H.265/H.264 video formats
- Third-party IP cameras supported with ONVIF conformance:
- HDMI1/VGA and HDMI2 independent outputs provided
- Up to 12 Megapixels resolution recording
- 8 SATA HDDs, Up to 10TB for each HDD
- Various fisheye dewarping modes for live view and playback for both web interface and GUI
- Support N+1 Hot spare
- Support for 12V Power output
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade
- Support OSD function
- Support PTZ control function
- Support export system log
- Support different User authorized level



# PACKAGE KITS

## K-UK-T0404



- 2MP Turret Camera Kit (4 camera with NVR)
- Support Ultra 265/H.265/H.264 video formats
- Plug & Play with 4 independent PoE network interfaces
- Support 1-ch HDMI, 1-ch VGA, HDMI and VGA
- 1 SATA HDD, up to 10 TB
- Support cloud upgrade
- Turret Camera
- Smart IR, up to 30 m, (98 ft)
- D DNR
- Ultra 265,H.265,H.264,MJPEG
- Wide temperature range: -30°C to 60°C
- IP67

## K-UK-B0404




- 2MP Turret Camera Kit (4 camera with NVR)
- Support Ultra 265/H.265/H.264 video formats
- Plug & Play with 4 independent PoE network interfaces
- Support 1-ch HDMI, 1-ch VGA, HDMI and VGA
- 1 SATA HDD, up to 10 TB
- Support cloud upgrade
- Bullet Camera,
- Smart IR, up to 30 m, (98 ft)
- D DNR,
- Ultra 265,H.265,H.264,MJPEG
- Wide temperature range: -30°C to 60°C
- IP67

## K-UK-W0408



- 2MP Wireless Bullet Camera Kit (4 camera with 8 CH NVR)
- Embedded WiFi Module with high-performance and high stability
- Support CCMP encryption and WPA2-PSK authentication
- Support IP cameras with WiFi in access
- Support Ultra 265/H.265/H.264 video formats
- 8-channel input
- Support 1-ch HDMI, 1-ch VGA, HDMI and VGA
- Support cloud upgrade
- Wifi Camera
- up to 30 m (98 ft)
- 2D/3D DNR, Ultra 265
- H.265, H.264-
- IP67

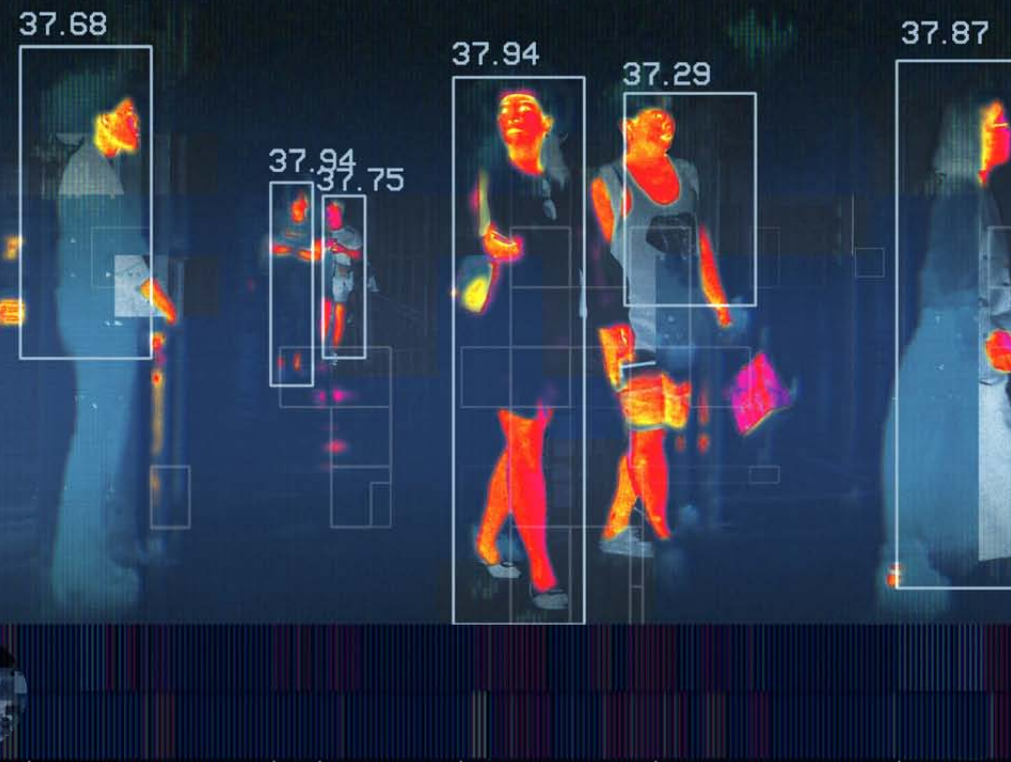

# COVID SCREENING PRODUCTS

## Key Features

- Quick and non-contact temperature detection
- Built in storage option
- Fast touchless face recognition
- High accuracy rate > 99%
- Deep learning algorithm
- Fast recognition time 0.2 seconds

### K-UA-BTM32



- Non contact forehead temperature sensor
- 2MP WDR Built in Camera
- High Accuracy Face Recognition
- Built in storage
- Mask Detection

### K-UA-BTMS1




- Non contact wrist temperature sensor
- 2MP WDR Built in Camera
- High Accuracy Face Recognition
- Built in storage
- Mask Detection

### K-UA-2165H



- Non contact temperature sensor
- High Image Visibility
- Adjustable Emissivity
- Internal Storage option
- High Temperature Alert

### K-UJ-FRT-P8

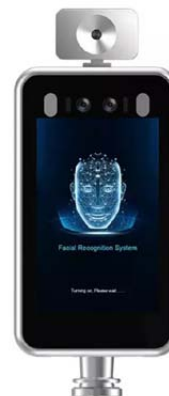


- Non contact temperature sensor
- Mask Detection
- Unique Facial Detection Algorithm
- 20,000 Face Database
- 8 Inch IPS HD Display



# ACCESS CONTROL


## K-MA-ARC801



### 8 Door Mifare Reader Kit

- Stand Alone Access Control Mangement with SSL Certified Encryption
- Kit includes Management Server-COSEC PANEL LITE, Four Panel-COSEC ARC DC200S and Eight Mifare Card Readers-COSEC READER CB
- Eliminates Server Cost
- Either Control In and Out Events or Control Eight Separate Doors
- Up to 25,000 Users and 500,000 Event Storage Capacity
- 25+ Advanced Access Control Features such as Time-Zone-User based Access, Anti-pass Back, 2-Person Rule, Guard Tour, Time Stamping and More

## K-MA-ARC401



### 4 Door Mifare Reader Kit

- Stand Alone Access Control Mangement with SSL Certified Encryption
- Kit includes Management Server-COSEC PANEL LITE, Two Panel-COSEC ARC DC200S and Four Mifare Card Readers-COSEC READER CB
- Eliminates Server Cost
- Either Control In and Out Events or Control Four Separate Doors
- Up to 25,000 Users and 500,000 Event Storage Capacity
- 25+ Advanced Access Control Features such as Time-Zone-User based Access, Anti-pass Back, 2-Person Rule, Guard Tour, Time Stamping and More

## K-MA-DCCM01



### Mifare Smart Card based Door Controller / Stand Alone (Cloud based)

- Mifare Smart Card Reader
- Access Control and Time-Attendance
- IP65 Rating
- 50,000 Events Storage
- Built-In Power over Ethernet (PoE)
- Built-In Door Lock Port, Door Sense Port, Exit Reader Port, Exit Switch Port, RS-485 and Ethernet Interfaces
- Tri Color LED and Buzzer
- 12VDC Power Supply through Adaptor or Battery Backup

## K-MA-RDF001



### Fingerprint and Mifare Smart Card Based Reader (Fingerprint replacement for kit)

- Optical Fingerprint and Mifare Smart Card based Reader
- RS-232/RS-485 Interface
- IP65 Rating
- Tamper Detection
- Tri Color LED and Buzzer
- 12VDC Power Supply through Adaptor or Battery Backup
- Compatible with any COSEC Door Controllers (Except COSEC DOOR FOT)



# REGULAR SWITCHES

## K-BS-1508D



- 8 gigabit TX ports
- unmanaged
- iron-hull, fanless
- external power adapter
- AC220V
- desk-top installation

## K-BS-S1516D



- 16 gigabit TX ports
- unmanaged
- 4 DIP groups
- large cache
- thunder-proof
- AC220V
- fanless
- 11-inch chassis
- rack-mounted installation

## K-BS-1526D



- 24 gigabit TX ports+
- 2 gigabit SFP ports
- unmanaged
- large cache
- thunder-proof
- AC220V, fanless
- 19-inch chassis
- rack-mounted installation

## K-BS-S2510C

MANAGEABLE



- Ethernet switch with 8 GE ports and 2 GE SFP ports (1 console port, 8 GE TX ports 2 100/1000M SFP Ports)
- standard AC 220V power supply
- fanless

## K-BS-S2528C

MANAGEABLE



- Ethernet switch with 24 GE ports and 4 GE SFP ports (1 console port, 24 GE TX ports, 4 100/1000M SFP Ports)
- standard AC 220V power supply
- fanless

## K-BS-S2928E

MANAGEABLE

STACKABLE



- Ethernet layer 3 lite switch with 24 GE ports and 4 GE SFP ports (1 console port, 24 GE TX ports, 4 10GE/GE SFP+ Ports)
- 100-240VAC input
- Fan-less

## K-BS-S2954

MANAGEABLE

STACKABLE



- Ethernet layer 3 lite switch with 48 GE ports and 6 x 10GE/GE SFP+ ports (1 console port, 48 GE TX ports, 6 x 10GE/GE SFP+ Ports)
- 100-240VAC input

## K-BS-S2952C

MANAGEABLE

STACKABLE



- Ethernet switch with 48 GE ports and 4 x 10GE SFP ports (1 console port, 48 gigabit TX ports, 4 10GE/GE SFP+ ports)
- standard AC 220V power supply

# POE SWITCHES

## K-BP-1006-4P



- Unmanaged Ethernet POE switch with 4 100M POE TX ports and 2 100M TX uplink ports
- large buffer for CCTV application
- lightning protection
- built-in one AC 220V power supply
- POE budget 60W
- desktop installation

## K-BP-1510-8P



- Unmanaged Ethernet POE switch with 8 gigabit POE Base-T ports
- 2 gigabit Base-T ports
- large buffer
- lightning protection
- AC 220V
- 130W POE power
- desktop installation

## K-BP-1518-16P



- Unmanaged Ethernet POE switch with 16 gigabit POE Base-T ports
- 2 gigabit SFP ports
- large buffer
- lightning protection
- AC 220V
- 300W POE power
- rack-mounted installation

## K-BP-1526-24P



- Unmanaged Ethernet POE switch with 24 gigabit POE Base-T ports
- 2 gigabit SFP ports
- large buffer
- lightning protection
- AC 220V
- 370W POE power
- rack-mounted installation

## K-BP-2510-P

MANAGEABLE



- Ethernet POE switch with 8 gigabit TX ports and 2 gigabit optical ports (1 console port, 8 gigabit POE TX ports)
- 2 1000M optical ports
- standard AC220V power supply
- 150W POE power consumption
- the cooling fan
- 1U
- desktop installation

## K-BP-2520-P

MANAGEABLE



- Ethernet POE switch with 16 gigabit TX ports and 2 gigabit optical ports and 2 gigabit Combo ports (1 console port, 16 gigabit POE TX ports)
- 2 100/1000M optical ports
- 2 gigabit Combo ports
- standard AC220V power supply
- 240W POE power consumption
- the cooling fan
- 1U
- standard 19-inch rack-mounted installation

## K-BP-2528-P

MANAGEABLE



- Ethernet POE switch with 24 gigabit TX ports and 4 gigabit combo ports (1 console port, 24 gigabit POE TX ports)
- 4 gigabit TX/SFP combo ports
- standard AC220V power supply
- 370W POE power consumption
- the cooling fan
- 1U
- standard 19-inch rack-mounted installation

## K-BP-S2928P

MANAGEABLE



STACKABLE

- Manageable L2+ Ethernet POE switch with 24 gigabit TX ports and 4 x10GE SFP ports (1 console port, 24 gigabit POE TX ports, 4 10GE/GE auto-adaptation SFP ports)
- standard AC110-220V power supply
- 400W POE power consumption

# ACCESS POINT

## Key Features

- Plug and play feature
- Long Range transmission
- Designed for video surveillance
- Weatherproof enclosure

### K-BW-2100-T22D-W2



- Ceiling-mounted Intelligent Wireless AP (1\*GE PoE WAN port)
- Built-in MIMO antenna
- 802.11 a/b/g/n/ac/wave2
- 1167M wireless bandwidth
- POE power supply
- Up to 200 user access
- 32 SSIDs

### K-TA-3226-POE



- Wireless Access Point 2.4 GHz (with POE)
- POE Power/ for CCTV wifi transmission
- IEEE802.11b/g/n/3u100Mbps LAN\*2
- Chipset: AR9344 600MHz
- Transmission Range: 3KM
- Frequency: 2.4 GHz
- Wireless Speed: 300MBPS
- Transmitting Power: 27 DBM
- Antenna Gain: 16 DB
- Antenna Direction: Vertical & Horizon
- Voltage: 24 V
- Ampere: 1 A

### K-TA-3526-POE



- Wireless Access Point 5.8 GHz (with POE)
- POE Power/ FOR CCTV WIFI Transmission
- IEEE802.11b/gn/3u100Mbps LAN\*2
- Chipset: AR9344 600MHz
- Transmission Range: 3KM
- Frequency: 5.8 GHz
- Wireless Speed: 300MBPS
- Transmitting Power: 27 DBM
- Antenna Gain: 16 DB
- Antenna Direction: Vertical & Horizon
- Voltage: 24 V
- Ampere: 1 A

### K-TA-POE29-RX548



- 4-port Outdoor POE switch
- 4\* 10/100M POE
- 1\*10/100M UPLINK RJ45
- IEEE802.3, IEEE 802.3u, 802.3af, IEEE802.3x
- Backplane Bandwidth: 1Gbps
- MAC: 4K
- UL external power supply (Gospower)
- Water Proof IP 65
- Outdoor switch

# ACCESSORIES

MODEL NUMBER	PRODUCT	SPECIFICATIONS
K-UA-WT		Wall Mount Bracket for turret cameras
K-U-WM03-D		Wall Mount Bracket for dome cameras
K-U-WE45		Wall mount for PTZ and dome cameras (add AE-TR-UF45-D or E for non PTZ camera applications) Dimensions(L×W×H) 230.3mm x 141mm x 201.5mm Weight 0.79kg
K-U-WE-45-A		Wall mount for PTZ and dome cameras (add AE-TR-UF45-D or E for dome application) Dimensions(L×W×H) 314mm x 141mm x 216mm Weight 1.0kg
K-U-CE45		Pendant mount for PTZ and dome cameras (add AE-TR-UF45-D or E for dome application) Dimensions(DxL) Φ116.5mm x 239mm Weight 0.67kg
K-U-UP08-A		Pole mount for PTZ and dome cameras (adjustable pole straps, max. diameter 5.7" / 127mm) (works with AE-TR-WE-45 and AE-TR-JB-12-IN) Dimensions(L×W×H) 215mmx170mmx52mm Weight 1.47kg

# ACCESSORIES

MODEL NUMBER	PRODUCT	SPECIFICATIONS
K-U-UC08-A		Corner mount for PTZ and dome cameras (works with AE-TR-WE-45 and AE-TR-JB-12-IN) Dimensions(LxWxH) 215mmx170mmx52mm Weight 1.47kg
K-UA-AMT		Adapter for Mini Dome and Turret Cameras Φ3.9 x 1.4in (Φ100 x 35mm), Weight: 0.66lb (0.3kg)
K-U-UF45-J		Adapter for Varifocal Dome Cameras Φ5.9 x 1.7in (Φ149 x 44mm), Weight: 0.44lb (0.2kg)
K-U-SE45		Pendant rod (200mm) for PTZ dome cameras Dimension (L) 200mm
K-U-SE45-A		Pendant rod (500mm) for PTZ and dome cameras Dimension (L) 500mm
K-UA-JFD(B)		Junction Box for Fixed Dome Cameras , (B) Black

# ACCESSORIES

MODEL NUMBER	PRODUCT	SPECIFICATIONS
K-UA-JFT(B)		Junction Box for fixed turret Cameras, (B) Black
K-UA-JVD		Junction Box for Varifocal Dome Cameras Φ5.7 x 1.6in (Φ145 x 40mm), Weight: 0.5lb (0.24kg)
K-UA-JVDB		Junction Box for Varifocal Dome Cameras Φ5.7 x 1.6in (Φ145 x 40mm), Weight: 0.5lb (0.24kg)
K-U-JB07-IN		7-inch Junction Box for Mini Bullet and Wall Mount Bracket L5 x W4.9 x H2.2in (L126 x W125 x H55mm), Weight: 1.6lb(0.72kg)
K-U-JB12-IN		12-inch Junction Box Indoor or outdoor, wall installation for PTZ dome camera, Dia.296 x 244 x 127mm (11.7" x 9.6" x 5"), 2.5kg(5.5lb), Aluminum alloy
K-U-UP06-IN		Pole mount (with adjustable pole straps) Dimensions(L x W x H) 120mmx120mmx53.4mm (4.7"x4.7"x2.1") Weight 0.45kg
K-UA-WE-45-B		Goose Neck Mount Bracket for PTZ and dome cameras Dimensions(LxWxH) 166mm x 819mm x 876mm Weight 4.2kg



TORONTO | QUEBEC

210 Cochrane Dr, Unit 10  
Markham, Ontario, L3R 8E6  
Canada

3600 Rue F-X Tessier, Unit H  
Vaudreuil-Dorion QC J7V 5V5  
Canada



905-233-7338  
[sales@konntek.com](mailto:sales@konntek.com)